



PU20S

Access control / Electronic equipment

You control the flow of traffic to a secure access point.

The Unitrans PU20S single-column gate can be fitted to most doors.

When the door is opened and until it is closed, the gate analyses the flow of traffic and detects attempts to pass through in groups or cross paths.

In this case, information is delivered via the controller located in the external box.

The PU20S is positioned on the opposite side to the door opening.




Detection



Compact



Made in France

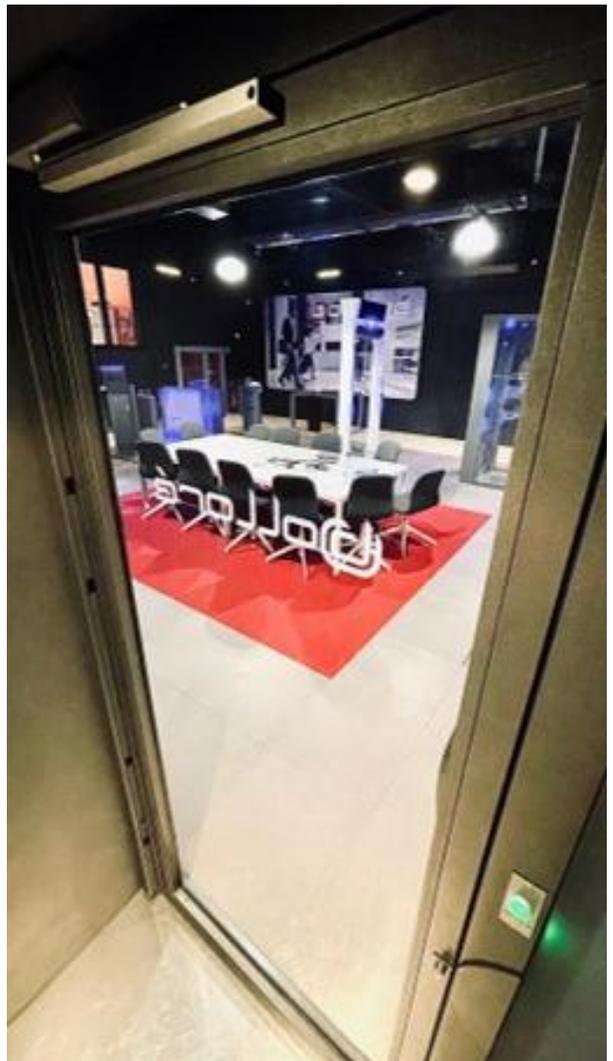

Features

Height

1,990 mm

Profile width

52 mm

Profile thickness

35 mm

Weight of the gantry

15 kg

Weight of the CPU

10 kg

Passage width

900/1200 mm

Power supply

12 V – 0.33 A – 4 W

Detailed description

Structure

- Lacquered steel column
- Anthracite grey colour as standard
- Reversible assembly: Right/Left
- Fixing: Screwed onto façade or frame

Unique passage detection

- Unique passage detection via infrared sensors
- Voice synthesis for fraud signalling

Equipment

- Remote IP52 box – 241 x 192 x 128 mm
- Control unit with programmable logic controller
- RJ45 connection cable (3 metres)
- Dry contact terminal block for available information
- Self-protection (AP)



Compact




Made in France




Detection



Contactless

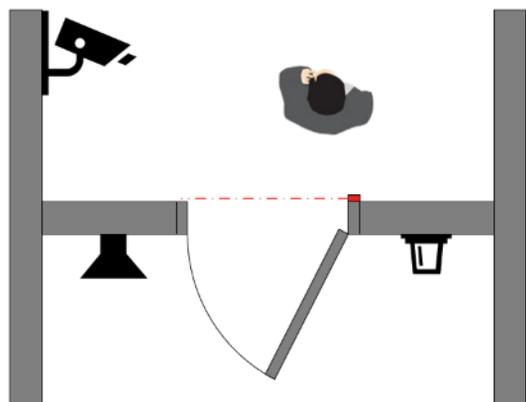

VALID passage

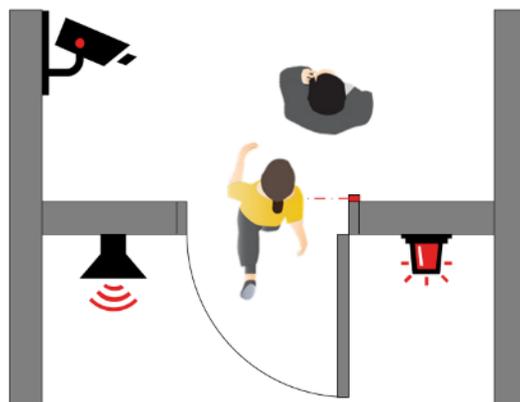

FRAUDULENT passage

Other configurations

- **PU20SI** version: offset mounting for a door that opens inwards.
- **PU20D** version for additional security: double column
- Version without voice synthesis

Work to be carried out by the customer

- Provision of a clean, level mounting bracket
- 12V power supply
- Door contact
- Equipment mounting
- Connection of equipment
- Specific study related to the location to be equipped
- ...

Avertissements

Document non contractuel.

Les enfants doivent être maintenus sous surveillance d'un adulte. Le client doit s'assurer du bon respect des réglementations lui incombant.

Dans un souci permanent de suivi technologique de ses produits, BOLLORÉ se réserve le droit de modifier, supprimer, cette fiche produit sans préavis.

Bolloré Protection S.A.S

Tel. : +33 (0)2 40 77 82 82

Email : commercial@bollore.fr

14 rue Pasteur – PA du Ragon

44 119 Treillières – France

SIRET : 305 419 897 00031

APE 2630Z – TVA IC FR31 305 419 897 – 305 419 897 RC Nantes