



# B620

Access control / Single-person door

The B620 single-person door secures access to sensitive areas.

With its inward swing, the door limits access to one person at a time.

Upon authorisation by the access control system, the door is manually operated to open inwards into the cell in single passage mode or PRM access mode, depending on the badge settings.

On specific command, it allows logistical access by opening outwards.

In an emergency, the door also opens outwards.



PRM compatible



Logistics



Evacuation possible



## Features

### Width

1,500 mm

### Depth

700 mm

### Height

2,180 mm

### Clearance height

2,042 mm

### Weight

385 kg

### Cell

400 x 580 mm

### Passage width in PRM/SSI mode

900 mm or 1 UP

### Passage width in logistics mode


1,435 mm

### Locking force

2 x 3000 N

### Power supply

110/230V single-phase 50/60Hz

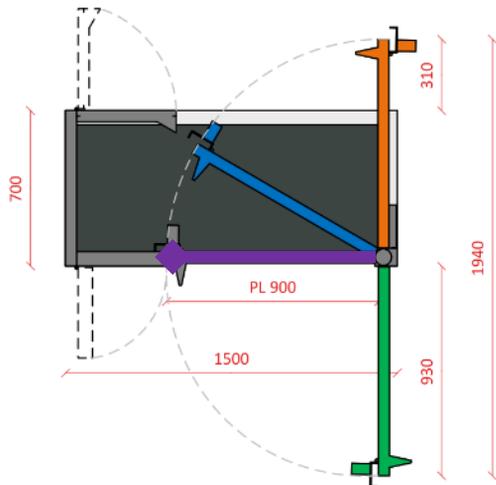

## Detailed description

### Structure

- Powder-coated steel tubular profiles
- Retractable stop for wheelchair access
- Removable honeycomb walls for logistics passage
- Choice of RAL colour

### Locking

- 4 NFS 61-937 certified electromagnetic suction cups
- Mechanical over-locking 1 European cylinder lock

### Doors

- Hinged door with inward/outward swing
- Right-hand pivot
- Glazed (P6B) or opaque door infill
- Retractable strike plate for evacuation
- Door closer

### Equipment

- Presence detection
- Terminal block with dry contacts for information transfer
- Anti-crossing system
- Interior lighting
- Central management unit integrated into the roof
- Confirmation of passage

### Passage flow

10 to 12 people/min

### Key

- Accessible opening / Logistics
- Pedestrian opening / Single passage
- Door closed
- Emergency exit unlocking
- Manual opening for logistics



Logistics



PMR compatible



Detection



Compact



Evacuation



Made in France

### Optional equipment

- Additional 3-point mechanical interlock
- Left pivot
- Automatic disengagement for logistics function
- Pre-frame mounting
- Opacifying film on glass door
- Window on solid door
- Special handles on request
- Backup battery:
  - ≈ 3 hours on standby and approximately 2 hours in continuous use
- ...

### Work to be carried out by the customer

- Provision of a clean, level finished floor
- Supply and connection ducts
- for various networks: Ø30mm
- Door fixing
- Connection of equipment
- Integration of any accessories
- Power supply: 3x2.5mm<sup>2</sup>
- Access control cables
- Fire detection and manual trigger cables
- Specific study related to the location to be equipped
- ...

## Avertissements

Document non contractuel.

Les enfants doivent être maintenus sous surveillance d'un adulte. Le client doit s'assurer du bon respect des réglementations lui incombant.

Dans un souci permanent de suivi technologique de ses produits, BOLLORÉ se réserve le droit de modifier, supprimer, cette fiche produit sans préavis.

## Bolloré Protection S.A.S

Tel. : +33 (0)2 40 77 82 82

Email : commercial@bollore.fr

14 rue Pasteur – PA du Ragon

44 119 Treillières – France

SIRET : 305 419 897 00031

APE 2630Z – TVA IC FR31 305 419 897 – 305 419 897 RC Nantes