



XS airlock

Security layout/Security airlock

The XS airlock secures access to sensitive areas.

With its modular design, it can be easily installed in existing or new premises. It is available with a 900 mm or 700 mm passage width.

Upon authorisation by the access control system, the doors open manually, one after the other, creating an airlock effect.

Passage is analysed inside the airlock.

If multiple people are detected passing through (optional), users are asked to exit the airlock and repeat the procedure normally.




PMR compatible



Detection



Anti-intrusion

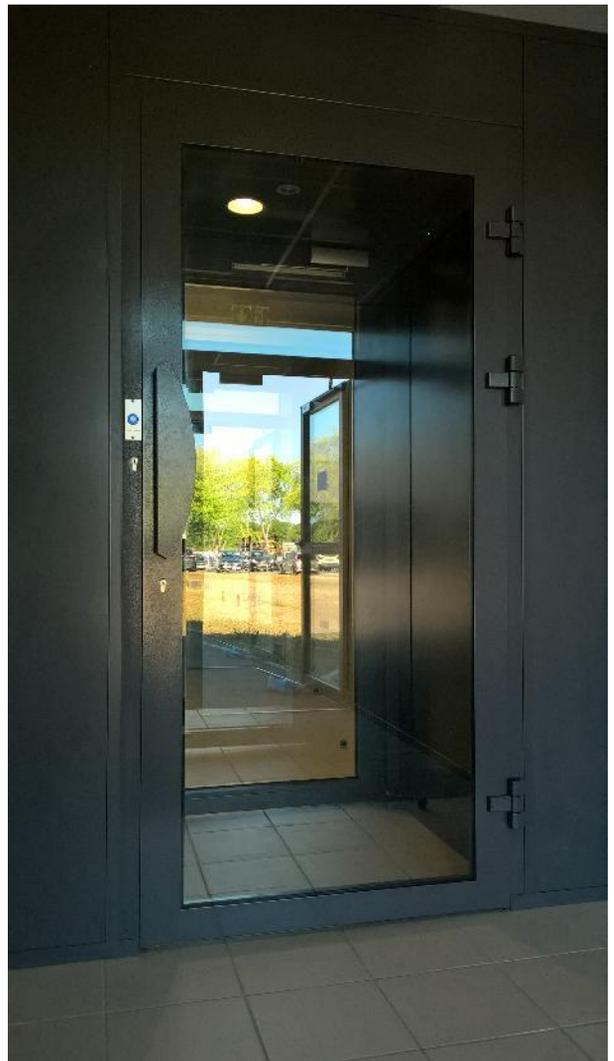

Features

Depths

- 900 mm (XS-700)
- 1,100 mm (XS-900)

Widths

- 908 mm (XS-700)
- 1,108 mm (XS-900) or 1 UP

Passage width

- 700 mm (XS-700)
- 900 mm (XS-900) or 1 UP
- Custom dimensions: please contact us

Height

2,190 mm

Weight

- 400 kg (XS-700)
- 450 kg (XS-900)

Locking force

6,500 N

Power supply

110/230V single-phase 50/60 Hz

Power consumption

50 to 300W depending on use

Detailed description

Structure

- Powder-coated steel
- Coating: Choice of RAL colour
- Two 4 mm sheet metal side profiles

Mechanical equipment

- Two door units with P1/P2 manual anti-lift system, left or right pivot depending on configuration
- Two brushed stainless steel threshold bars, 2 mm thick
- P5A burglar-proof or opaque glazing
- TS3000 door closer with sliding arm
- Electromagnetic locks
- Two mechanical locking cylinders

Electronic equipment

- LED-type controlled lighting
- IRA sensor presence detection
- Lock and door position sensors
- External control box 600 x 400 x 200 mm
- Speech synthesis

Passage flow

1 to 6 people/minute depending on the configuration selected



Burglar-proof



Compatible with persons with reduced mobility



Detection



Bulletproof



Made in France

Optional equipment

- Operating console
- Intercom
- Window decal
- Integrated manual trigger
- Unique passage detection via PU20S or PU20D column
- Single passage detection via 2-zone contact mat
- Human presence detection in the equipment airlock (BodyDetect)
- Multi-point electromagnetic lock
- Multi-point mechanical deadbolt
- CR3 burglar-proof features
- EI60 fire-rated features
- Door operator (motorisation)
- Reinforced walls
- LIDAR presence detection
- Interior totem
- Backup battery:
≈ 4 hours on standby and approximately 3 hours in continuous use

Work to be carried out by the customer

- Provision of a clean, level finished floor
- Supply and connection ducts for various networks: 30 mm diameter
- Floor mounting of equipment
- Connection of equipment
- Integration of accessories
- Power supply: 3x2.5mm²
- Access control cables
- Fire detection and manual trigger cables
- Specific study related to the location to be equipped
- ...

Avertissements

Document non contractuel.

Les enfants doivent être maintenus sous surveillance d'un adulte. Le client doit s'assurer du bon respect des réglementations lui incombant.

Dans un souci permanent de suivi technologique de ses produits, BOLLORÉ se réserve le droit de modifier, supprimer, cette fiche produit sans préavis.

Bolloré Protection S.A.S

Tel. : +33 (02) 40 77 82 82

Email : commercial@bollore.fr

14 rue Pasteur – PA du Ragon

44 119 Treillières – France

SIRET : 305 419 897 00031

APE 2630Z – TVA IC FR31 305 419 897 – 305 419 897 RC Nantes